


LEGEND:

- PROPOSED SIDEWALK
- PROPOSED CONCRETE DRIVEWAY APPROACH
- PROPOSED CONCRETE CURB & GUTTER
- PROPOSED TOE AND RETAINING WALL
- TREE TO BE REMOVED
- PROPOSED CONCRETE SCUPPER
- EXISTING TRAFFIC SIGN
- PROPOSED TRAFFIC SIGN
- EXISTING MAILBOX
- PROPOSED MAILBOX
- EXISTING WATER METER ADJUST TO GRADE
- EXISTING WATER VALVE ADJUST TO GRADE
- EXISTING HANDHOLE BOX ADJUST TO GRADE

NOTES:

1. SIDEWALKS AND CURB RAMPS TO BE CONSTRUCTED AND INSPECTED IN ACCORDANCE WITH PROWAG GUIDELINES.
2. REFER TO TOWN OF HICKORY CREEK DETAILS FOR SIDEWALKS AND DRIVEWAYS. REFER TO TXDOT PED-18 DETAILS FOR CURB RAMPS.
3. LOCATION OF SIDEWALK, CURB RAMPS, CURB & GUTTER AND WALLS, AND SIGNS AND PAVEMENT MARKING ARE APPROXIMATE. CONTRACTOR TO CONFIRM LOCATION WITH THE TOWN IN THE FIELD AND COORDINATE ADJUSTMENTS BEFORE CONSTRUCTION.
4. CONTRACTOR MUST RESTORE DISTURBED AREAS WITH SOD MATCHING THE EXISTING SPECIES. PAYMENT FOR SOD WILL BE LIMITED TO A STRIP 2 FEET WIDE ON EITHER SIDE OF THE SIDEWALK.
5. CONTRACTOR MUST LOCATE AND REPAIR ANY DAMAGE TO IRRIGATION SYSTEMS AFFECTED BY CONSTRUCTION. BEFORE CONSTRUCTION BEGINS, THE CONTRACTOR MUST COORDINATE WITH THE TOWN AND THE OWNER OF THE IRRIGATION SYSTEM AND DOCUMENT THE EXISTING PRE-CONSTRUCTION CONDITION.
6. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO:
 - A) PREVENT ANY DAMAGE TO PROPERTY OWNER'S POLES, FENCES, SHRUBS, ETC.,
 - B) PROVIDE ACCESS TO ALL DRIVES DURING CONSTRUCTION,
 - C) PROTECT ALL UNDERGROUND UTILITIES.
 - D) NOTIFY ALL UTILITY COMPANIES AND VERIFY LOCATION OF ALL UTILITIES PRIOR TO START OF CONSTRUCTION.

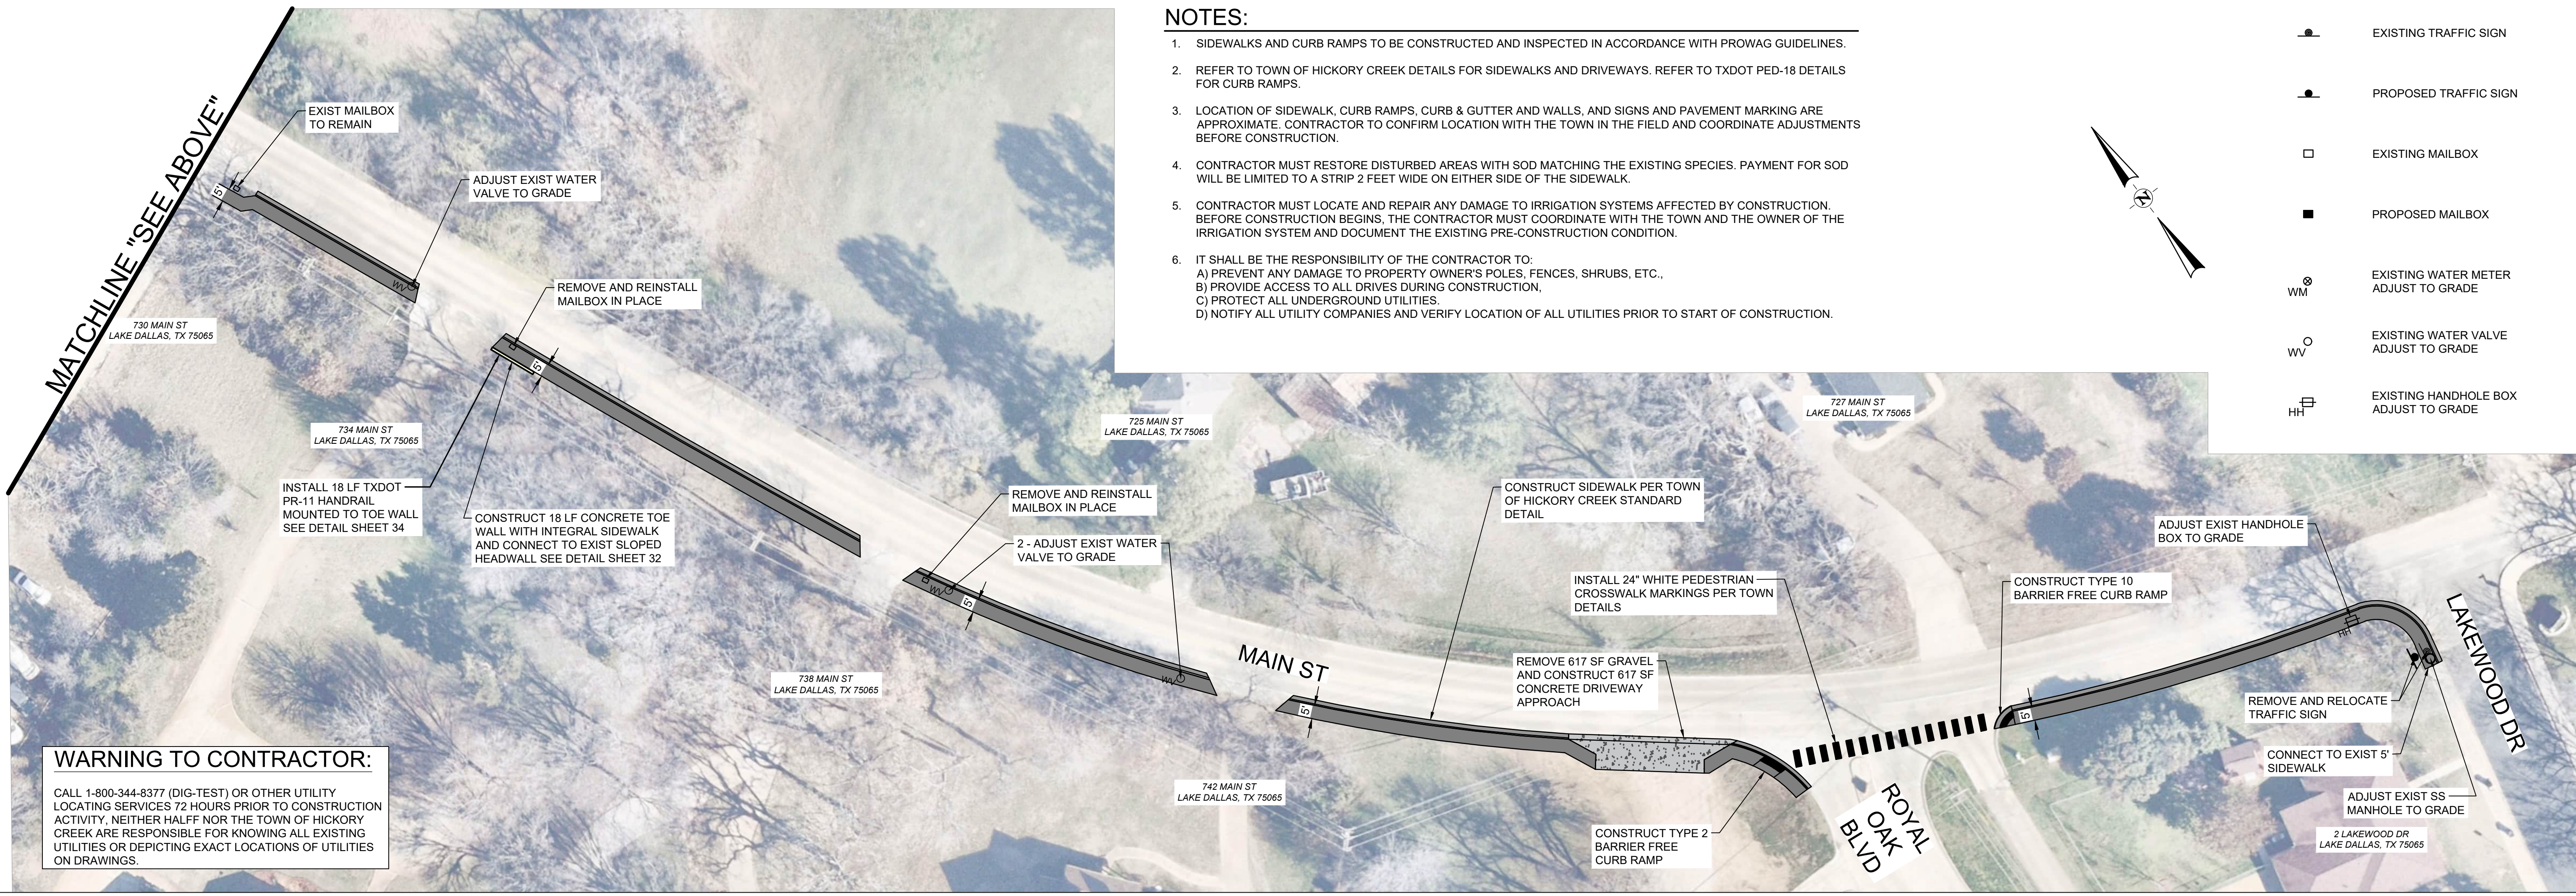

WARNING TO CONTRACTOR:

CALL 1-800-344-8377 (DIG-TEST) OR OTHER UTILITY LOCATING SERVICES 72 HOURS PRIOR TO CONSTRUCTION ACTIVITY, NEITHER HALF NOR THE TOWN OF HICKORY CREEK ARE RESPONSIBLE FOR KNOWING ALL EXISTING UTILITIES OR DEPICTING EXACT LOCATIONS OF UTILITIES ON DRAWINGS.

REVISION	NO.	DATE	DESCRIPTION

BSV
DESIGNED BY:
BSV
DRAWN BY:
KJG
CHECKED BY:

2601 MEACHAM BLVD., SUITE 600
FORT WORTH, TEXAS 76137
TEL. (817) 847-1422

NAME: KEVIN J. GRONWALDT
DATE: 8/15/2024
TBPELS ENG. FIRM #F-312

THE SEAL APPEARING ON THIS DOCUMENT WAS AUTHORIZED BY:

KEVIN J. GRONWALDT 130871
NAME PE LICENSE NO.
8/15/2024
DATE
THE RECORD COPY OF THIS DRAWING IS ON FILE AT THE OFFICES OF:
HALFF ASSOCIATES, INC.
2601 MEACHAM BLVD STE 600
FORT WORTH, TEXAS 76137
TBPELS ENGINEERING FIRM #F-312 TX
FIRM OR BUSINESS NO. STATE

City-close, lakeside living!

TOWN OF HICKORY CREEK
FY2024 PAVEMENT REPAIRS AND PHASE 4 SIDEWALK EXTENSION

**MAIN STREET
SIDEWALK EXTENSION**

PROJECT NO.: 37638.124
ISSUED: 8/15/2024
SCALE: 1" = 30'

12

PAGE NUMBER 12 OF 42

FILE NAME: A:\37000\37638\124\PW\CADD\Sheets\C-PLAN-PAV-06-37638.dwg DATE: August 15, 2024, TIME: 3:28 PM, USER: ah5462